| No. | Name | Note | No. | Name | Note |
|---|---|---|---|---|---|
| 1 | Angle valve | 1/4"Flare | 17 | Refrigerant service valve | 1/4"Flare |
| 2 | Discharge flange | 2" | 18 | Connector | 1/4"Flare |
| 3 | Solenoid valve | 50%(NC) | 19 | Liquid injection connector | 5/8"Flare, option |
| 4 | Solenoid valve | 75%(NC) | 20 | Suction flange | 3" |
| 5 | Solenoid valve | 35%(NC) | 21 | Cable box | Standard |
| 6 | Liquid(oil or refrigerant) injection connector | 1/4"Flare, option | 22 | Service flange | |
| 7 | Capillary | | 23 | Oil drain valve | option |
| 8 | Check valve | 2" | 24 | Oil level switch | option |
| 9 | Oil sight glass | Low side | 25 | Discharge temp. sensor | 110°C |
| 10 | Oil heater | 150W/300W | 26 | Safety Valve | option |
| 11 | Oil filter cartridge | | 27 | Economizer port | 7/8", solder |
| 12 | Oil pressure differential switch | Connector, option | 28 | Oil sight glass | High side |
| 13 | Oil cooler connector(out) | 5/8"Flare, option | 29 | Oil temp. sensor | option |
| 14 | Stop pin | option | 30 | Over flow port | option |
| 15 | Oil cooler connector(in) | 5/8"Flare, option | 31 | Solenoid valve | Stepless(NO), option |
| 16 | Angle valve | 1/4"Flare | | | |

*All stop valves are optional

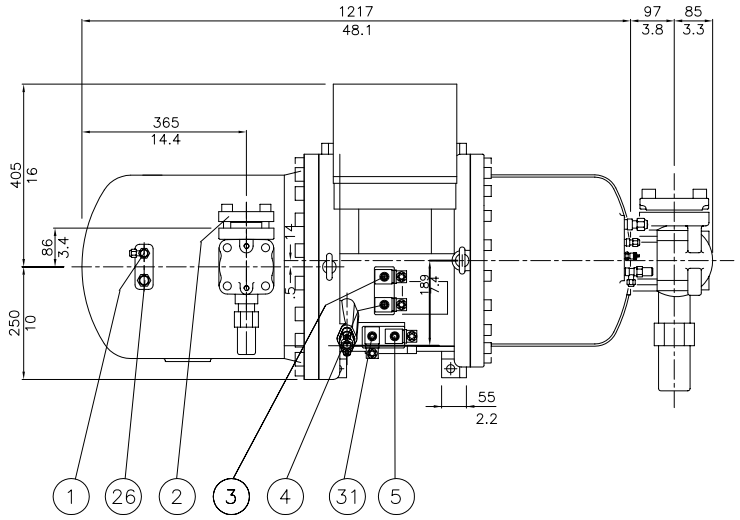


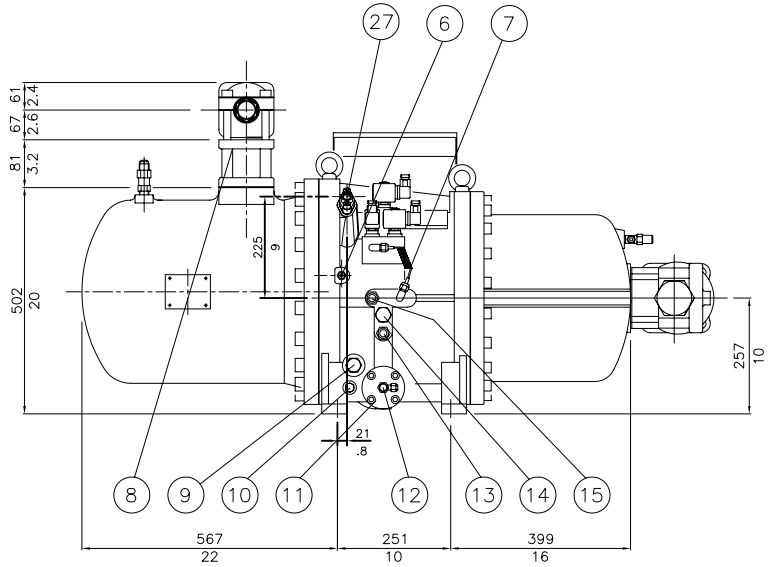


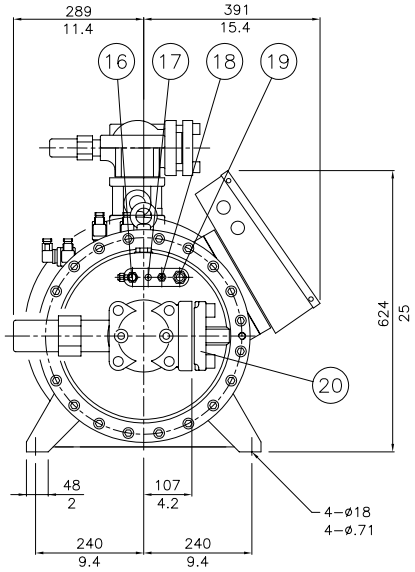


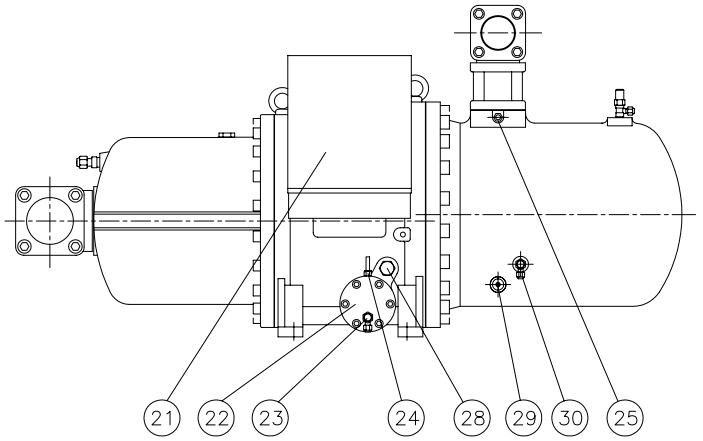


| | |
|---|---|
| Dimensional Outline Drawing & Component Description for Stepless or Modulating–Type Capacity Control Application | |
| Hanbell Model | RC2–310B |
| Date and Rev. | 07/31/2008 A |
| Drawn By | B.Lai |


Micro Control Systems, Inc.
5877 Enterprise Parkway
Fort Myers, Florida 33905
Tel. (239) 694–0089 Fax (239) 694–0031
E–mail: compressors@mcscontrols.com

Hanbell Precise Machinery Co., Ltd.